NASA - TM - 84267

NASA-TM-84267 19820023768

A New Numerical Method for the Simulation of Three-Dimensional Flow in a Pipe

A. Leonard and A. Wray

July 1982

NASA

National Aeronautics and
Space Administration

ENTER:

N82 - 31644#

A New Numerical Method for the Simulation of Three-Dimensional Flow in a Pipe

A. Leonard
A. Wray, Ames Research Center, Moffett Field, California

N82 - 31644#

A NEW NUMERICAL METHOD FOR THE SIMULATION OF THREE-DIMENSIONAL

FLOW IN A PIPE

A. Leonard and A. Wray

NASA Ames Research Center
Moffett Field, CA 94035 U.S.A.

INTRODUCTION

In the last few years, major advances have been made in the numerical simulation of wall-bounded transitional and turbulent shear flows. So far, most of the emphasis has been on flows with planar boundaries. Transitional flows in a flat-plate boundary layer (ref. 1) and in a channel (ref. 2), as well as turbulent channel flow (ref. 3), have been investigated without modeling the near-wall region; Moin (ref. 4) gives a critique of these investigations. Except for the study of Patera and Orszag (ref. 5) of axisymmetric pipe flow and the simulation of turbulent flow in annuli by Schumann (ref. 6), using modeled boundary conditions, very little work has been reported on nonplanar flows.

In this paper we present a new numerical technique for simulating three-dimensional, unsteady, incompressible pipe flows and demonstrate its utility and accuracy. Each vector function in the expansion of the velocity field is divergence-free and satisfies the boundary conditions for viscous flow. Some of the benefits of the expansion technique are as follows: (1) pressure is eliminated from the dynamics, (2) only two unknowns per "mesh point" are required, (3) it provides implicit treatment of the viscous terms at no extra computational cost, and (4) no fractional time-steps are required.

In addition, the method uses spectral expansions: Fourier series in the azimuthal (θ) and streamwise (x) directions and global polynomials in the radial (r) direction. Thus, for smooth velocity fields, we expect rapid convergence of our expansions, independent of boundary constraints, as long as the radial polynomials are eigenfunctions of a singular Sturm-Liouville problem (ref. 7). In general, Chebychev or Legendre polynomials are good candidates, but we show that for cylindrical geometry a certain choice of the Jacobi polynomials is particularly advantageous in minimizing the coupling of the resulting equations for the expansion coefficients while satisfying the analytical behavior of the flow variables near $r = 0$. As discussed below, the method has been tested on the linear stability problem for Poiseuille flow.

The governing equations are the incompressible Navier-Stokes equations for the velocity $\underline{u}$ and the disturbance pressure p,

$$\frac{\partial \underline{u}}{\partial t} + \underline{\omega} \times \underline{u} = -\nabla(p + \frac{1}{2} u^2) - \frac{dP}{dx} \hat{e}_x + \frac{1}{Re} \nabla^2 \underline{u} \tag{1}$$

$$\nabla \cdot \underline{u} = 0 \ . \tag{2}$$

Here $\underline{\omega} = \nabla \times \underline{u}$ is the vorticity, Re is the Reynolds number, $\frac{dP}{dx}$ is the constant mean pressure gradient, and the density $\rho = 1$ everywhere. The boundary condition at the pipe wall $(r = 1)$ is $\underline{u}\big|_{r=1} = 0$. We assume periodic boundary conditions in the x direction with period L.

We proceed formally by defining the projection operator $\mathscr{P}$ which projects an arbitrary vector field into the space of divergence-free fields satisfying tangency at the boundary; that is, if $\underline{\Omega}$ is an arbitrary vector field, then we have the unique decomposition,

$$\underline{\Omega} = \underline{\psi} + \nabla\varphi \tag{3}$$

where $\underline{\psi}$ satisfies

$$\nabla \cdot \underline{\psi} = 0 \quad , \quad \underline{\psi} \cdot \underline{n}\big|_{\text{boundary}} = 0 \tag{4}$$

and $\mathscr{P}$ is the operator that accomplishes this decomposition,

$$\mathscr{P}\underline{\Omega} = \underline{\psi} \tag{5}$$

By applying this operator to the momentum equation, we obtain the time-evolution of the divergence-free velocity field as (ref. 8)

$$\frac{\partial \underline{u}}{\partial t} + \frac{1}{Re} \mathscr{P}(\nabla \times \nabla \times \underline{u}) = -\mathscr{P}(\underline{\omega} \times \underline{u}) - \frac{dP}{dx} \hat{e}_x \tag{6}$$

Our overall strategy is to expand $\underline{u}$ in terms of divergence-free vector functions satisfying the viscous boundary conditions and periodicity in x and θ. We then substitute this expansion into equation (1) and apply a weighted residual method which mimics the application of the projection operator to obtain evolution equations for the expansion coefficients.

We write the velocity field $\underline{u}$ as the expansion

$$\underline{u}(r,\theta,x,t) = \sum_{n,k,\ell} a_{n,k,\ell}(t) \, \underline{\chi}_n(r) \exp(ikx + i\ell\theta) \tag{7}$$

where each expansion vector satisfies

$$\nabla \cdot \left[\underline{\chi}_n(r) \exp(ikx + i\ell\theta)\right] = 0 \tag{8}$$

and

$$\underline{\chi}_n(1) = 0 \tag{9}$$

We derive a system of ordinary differential equations (ODE's) for the coefficients $a_{n,k,\ell}$ by substituting the above expansion into the momentum equation and taking the inner product of the result with a set of weight vectors which are divergence-free,

$$\nabla \cdot \left[\underline{\xi}_m(r) \exp(-ikx - i\ell\theta)\right] = 0 \tag{10}$$

and satisfy the inviscid boundary condition,

$$\underline{\xi}_m(1) \cdot \hat{e}_r = 0 \tag{11}$$

[The (k,ℓ) dependence of $\underline{\chi}_n$ and $\underline{\xi}_m$ is suppressed.] This weighted residual method mimics the application of the projection operator. For example if $\underline{\zeta} = \underline{\xi}_m(r) \exp(-ikx - i\ell\theta)$ then

$$\int_V \underline{\zeta} \cdot \nabla\varphi \, dV = -\int_V (\nabla \cdot \underline{\zeta}) \varphi \, dV + \int_S \varphi(\underline{\zeta} \cdot \underline{n}) \, dS \tag{12}$$

$$= 0$$

for an arbitrary scalar field φ with periodic boundary conditions in x.

The result for each wave vector (k,ℓ) is a system of ODE's

$$A\underline{\dot{a}} + \frac{1}{Re} B \underline{a} = \underline{f} \tag{13}$$

where

$$A_{mn} = \int_0^1 \underline{\xi}_m \cdot \underline{\chi}_n \, rdr \tag{14a}$$

3

$$B_{mn} = \int_0^1 \underset{\sim}{\xi}_m \cdot \widetilde{\nabla \times \nabla \times \underline{\chi}_n} \, r\,dr \qquad (14b)$$

$$f_m = -\int_0^1 \underline{\xi}_m \cdot \left[\widetilde{\underline{\omega} \times \underline{u}} + 2\pi L \frac{dP}{dx} \hat{e}_x \right] r\,dr \qquad (14c)$$

and where $\sim$ denotes double-Fourier transformation in x and θ. Thus, except for the nonlinear term, the coupling of the equations occurs only through the radial modes.

The choice of radial functions in $\underline{\chi}_n$ and $\underline{\xi}_m$ must be made carefully to (1) minimize the coupling between radial modes (that is, obtain a banded structure for A and B if possible); (2) allow construction of A and B with relative ease; (3) obtain efficient computation of $\underline{f}$; and (4) obtain rapid convergence while satisfying the constraints imposed on $\underline{\chi}_n$ and $\underline{\xi}_n$, including the correct behavior as $r \to 0$.

We find that the sequence of expansion vectors $\left\{ \underline{\chi}_{-1}, \underline{\chi}_0^+, \underline{\chi}_0^-, \ldots, \underline{\chi}_n^+, \underline{\chi}_n^-, \ldots \right\}$ defined in the following satisfies the above requirements. For $n \geqslant 0$ the (r, θ, x) components are

$$\underline{\chi}_n^{\pm} = \begin{pmatrix} \chi_{n,r}^{\pm} \\ \chi_{n,\theta}^{\pm} \\ \chi_{n,x}^{\pm} \end{pmatrix} = \begin{pmatrix} \pm \, ikq_n^{\ell\pm1} \\ kq_n^{\ell\pm1} \\ \mp \frac{1}{r} \frac{d}{dr}(rq_n^{\ell\pm1}) - \frac{\ell}{r} q_n^{\ell\pm1} \end{pmatrix} \qquad (k \neq 0) \qquad (15)$$

where

$$q_n^{\ell} = r^{|\ell|}(1 - r^2)^2 g_n^{(|\ell|)}(r^2) \qquad (16)$$

and $g_n^{(\ell)}(y)$ is the shifted Jacobi polynomial (ref. 9),

$$g_n^{(\ell)}(y) = P_n^{(o,\ell)}(2y - 1) \qquad (17)$$

satisfying the orthogonality condition

$$\int_0^1 y^{\ell} g_m^{(\ell)}(y) g_n^{(\ell)}(y) \, dy = C_m^{\ell} \delta_{m,n} \qquad (18)$$

4

For the case $k = 0$, the above expansion vectors clearly are not complete and must be replaced by an alternative set. A convenient choice is given by ($n \geqslant 0$)

$$\underline{\chi}_n^- = \begin{pmatrix} -\dfrac{i\ell q_n^\ell}{r} \\[2mm] \dfrac{dq_n^\ell}{dr} \\[2mm] 0 \end{pmatrix} \qquad \underline{\chi}_n^+ = \begin{pmatrix} 0 \\[2mm] .0 \\[2mm] q_n^\ell \end{pmatrix} \tag{19}$$

It is a simple matter to verify that the expansion vectors defined above yield the correct behavior of $\underline{\tilde{u}}(r,k,\ell)$ as $r \rightarrow 0$; for example, if $\ell > 0$,

$$\tilde{u}_r \rightarrow \gamma r^{\ell-1}$$

$$\tilde{u}_\theta \rightarrow i\gamma r^{\ell-1}$$

$$\tilde{u}_x \rightarrow \beta r^\ell$$

where γ and β are complex constants. The additional vector $\underline{\chi}_{-1}$ is required because $\tilde{u}_\theta(k \neq 0)$ and $\tilde{u}_x(k = 0)$ would otherwise have a double zero at the wall.

The corresponding weight vectors are essentially the curl of the $\underline{\chi}$'s. More specifically, if $k \neq 0$ the weight vectors may be expressed as

$$\underline{\xi}_m^\pm = \nabla \times \nabla \times \begin{pmatrix} \mp i q_n^{\ell \pm 1} \\[2mm] q_n^{\ell \pm 1} \\[2mm] 0 \end{pmatrix} \tag{20}$$

while the $\underline{\chi}_n^\pm$ have the form

$$\underline{\chi}_n^\pm = \tilde{\nabla} x \begin{pmatrix} -i q_n^{\ell \pm 1} \\[2mm] \mp q_n^{\ell \pm 1} \\[2mm] 0 \end{pmatrix} \tag{21}$$

As a result, the (+) vectors are uncoupled from the (−) vectors. The resulting matrices A and B are nonadiagonal, except for an additional nonzero row and a column owing to the vector $\underline{\chi}_{-1}$. The limited bandwidth of the viscous matrix B results from the particular choice of the polynomials $g_n^{(\ell)}$ given by

equation (17). In particular, the Laplacian operator in the (r,θ) plane is equivalent to a tridiagonal matrix in the following sense:

$$\nabla^2 \left[q_n^\ell(r) \exp(i\ell\theta) \right] = \left(\frac{1}{r} \frac{d}{dr} r \frac{d}{dr} - \frac{\ell^2}{r^2} \right) q_n^\ell(r) \exp(i\ell\theta)$$

$$= r^\ell \left[b_n^\ell g_{n-1}^{(\ell)}(r^2) + c_n^\ell g_n^{(\ell)}(r^2) + d_n^\ell g_n^{(\ell)}(r^2) \right] \exp(i\ell\theta)$$

CONVERGENCE TESTS

As a test, the method described above was applied to the problem of determining the time eigenvalues for linearized flow in a pipe. The calculations were performed on a CDC 7600 computer. We assume $u \sim \exp(\lambda t)$ and order the eigenvalues such that Real $(\lambda_1) \geqslant$ Real $(\lambda_2) \geqslant \dots$. The results for λ_1 with Re = 9600, $\ell = 1$, k = 1, are given in the table below, where N + 2 is the number of radial modes in the expansion.

N	λ
20	−0.02312 − i 0.95050
25	−0.02317074 − i 0.95048142
30	−0.023170795769 − i 0.950481396659
35	−0.023170795764 − i 0.950481396668

Note that the convergence is exponential in N or some power of N, typical of spectral methods (ref. 7), and that there is no indication of significant round-off errors. The results agree with that of Salwen et al. (ref. 10), who obtained $\lambda_1 = 0.02317 - i(0.95048)$, using an expansion in Stokes' eigenfunctions to solve the linear stability problem.

In figure 1 we show convergence of some of the higher eigenvalues for the case k = 1, $\ell = 1$, Re = 3000, a Reynolds number in the range where a number of interesting transitional phenomena have been observed experimentally. Note that a large number of eigenvalues are predicted accurately for 30 to 35 radial expansion functions. In figure 2, the amplitudes of the coefficients of $\bar{\chi}_n$ for the eigenvalue λ_1 are shown as a function of n for four Reynolds numbers with k = 1 and $\ell = 1$. Each of the $\bar{\chi}_n$ are normalized so that

$$\int_0^1 |\bar{\chi}_n|^2 r\,dr = 1$$

6

and the radial expansion N = 35 (37 expansion functions) was used for all cases. Again, the coefficients approach zero exponentially in some power of n.

SUMMARY

A new numerical method has been developed to investigate three-dimensional, unsteady pipe flows using a new velocity-vector expansion method. Each vector function in the expansion set is divergence-free and satisfies the boundary conditions for viscous flow. Other features of the general technique are as follows: (1) pressure is eliminated from the dynamics; (2) only two unknowns per "mesh point" are required; (3) there is rapid convergence of spectral methods; (4) there is implicit treatment of the viscous term at no extra computational cost; and (5) no fractional time-steps are required. In the present application of the method to flow in a pipe, the behavior of each flow variable near the computational singular point is treated rigorously and expansions in Jacobi polynomials have been shown to be particularly advantageous. The method has been tested on the linear stability problem for Poiseuille flow and has demonstrated rapid convergence of the eigenvalues and eigenfunctions as the number of radial modes is increased.

REFERENCES

1. Wray, A., and Hussaini, Y.: Numerical Experiments in Boundary Layer Stability, AIAA Paper 80-0275, Pasadena, Calif., 1980.

2. Orszag, S. A., and Kells, L. C.: Transition to Turbulence in Plane Poiseuille and Plane Couette Flow, J. Fluid Mech., Vol. 96, 1980, p. 159.

3. Moin, P., and Kim, J.: Numerical Investigation of Turbulent Channel Flow, J. Fluid Mech., Vol. 118, 1982, p. 341.

4. Moin, P.: Numerical Simulation of Wall-Bounded Turbulent Shear Flows, Proceedings 8th International Conference on Numerical Methods in Fluid Dynamics (this issue).

5. Patera, A. T., and Orszag, S. A.: Finite-Amplitude Stability of Axisymmetric Pipe Flow, J. Fluid Mech., Vol. 112, 1981, p. 467.

6. Schumann, U.: Subgrid Scale Model for Finite Difference Simulations of Turbulent Flows in Plane Channels and Annuli, J. Comp. Phys., Vol. 18, 1975, p. 376.

7. Orszag, S. A.: Spectral Methods for Problems in Complex Geometries, _J. Comp. Phys._, Vol. 37, 1980, p. 70.

8. Chorin, A. J., and Marsden, J. E.: _A Mathematical Introduction to Fluid Mechanics._ Springer-Verlag, New York, 1979.

9. _Handbook of Mathematical Functions._ M. Abramowitz and I. A. Stegun, eds., NBS AMS 55, Sec. 22, 1968.

10. Salwen, H., Cotton, F. W., and Grosch, C. E.: Linear Stability of Poiseuille Flow in a Circular Pipe, _J. Fluid Mech._, Vol. 98, 1980, p. 273.
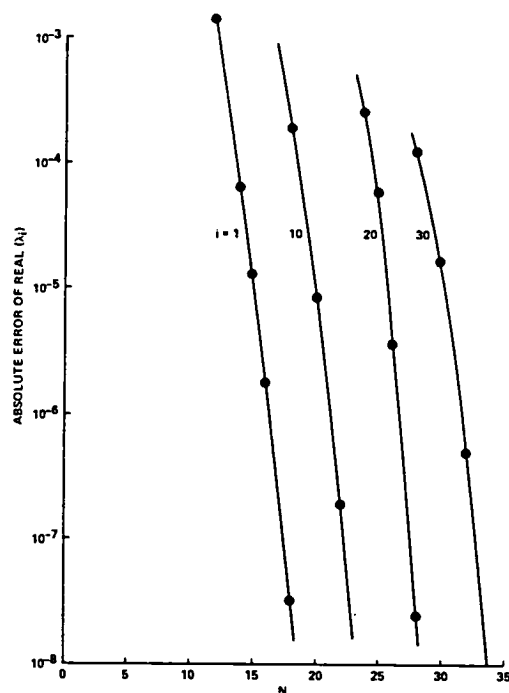
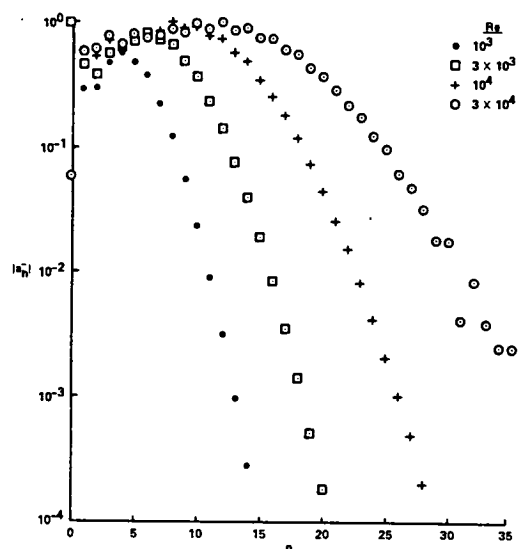Fig. 1. Convergence of Real (λ_i); $k = \ell = 1$, Re = 3000.

Fig. 2. Amplitudes of the expansion coefficients for the eigenvector corresponding to λ_1; $k = \ell = 1$.

8

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle A New Numerical Method for the Simulation of Three-Dimensional Flow in a Pipe		**5. Report Date** July 1982
		6. Performing Organization Code
7. Author(s) A. Leonard and A. Wray		**8. Performing Organization Report No.** A 8980
9. Performing Organization Name and Address NASA Ames Research Center Moffett Field, California 94035		**10. Work Unit No.** T 9517
		11. Contract or Grant No.
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, DC 20546		**13. Type of Report and Period Covered** Technical Memorandum
		14. Sponsoring Agency Code 505-31-91-01

15. Supplementary Notes

Point of contact: Anthony Leonard, Ames Research Center, MS 202A-1, Moffett Field, California 94035 (415) 965-6459 FTS: 448-6459

16. Abstract

A new numerical technique for simulating three-dimensional, unsteady, incompressible pipe flows is presented and its utility and accuracy is shown. Each vector function in the expansion of the velocity field is divergence-free and satisfies the boundary conditions for viscous flow. Some of the benefits of the expansion technique are as follows: (1) pressure is eliminated from the dynamics, (2) only two unknowns per "mesh point" are required, (3) it provides implicit treatment of the viscous terms at no extra computational cost, and (4) no fractional time-steps are required. The method uses spectral expansions: Fourier series in the azimuthal (θ) and streamwise (x) directions and Jacobi polynominals in the radial (r) direction.

17. Key Words (Suggested by Author(s)) Numerical Simulation, Turbulence, Transition, Pipe Flow, Cylindrical Geometry, Incompressible, Spectral Method	18. Distribution Statement Unlimited Subject Category 34

19. Security Classif. (of this report) Uncl	20. Security Classif. (of this page) Uncl	21. No. of Pages 10	22. Price* A02